


1				2				3				4				5				6			
Size	5 ~ 10	11 ~ 50	51 ~ 150	151 ~ 500	501 ~ 1200	1201 ~ 1800	1801 ~ 2500	2501 ~ 5000	5001 ~ 20000	Revisions													
Tolerance	±1	±2	±3	±5	±10	±15	±20	±30	±50														
										REV:	Description				Date		Approval						
										A.0													

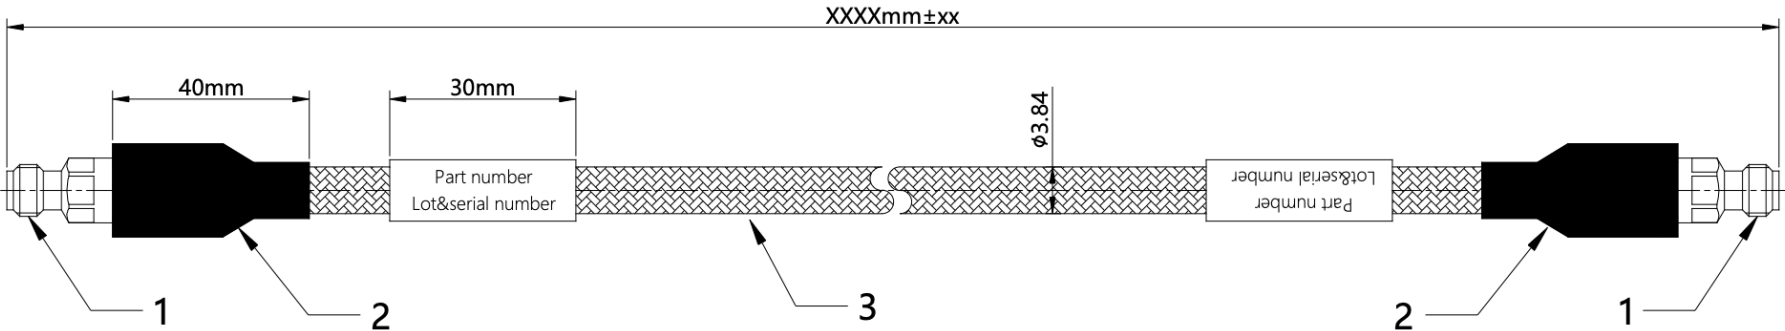

Performance:

- 1.Impedance: 50Ω
- 2.Frequency range: DC~ 110 GHz
- 3.VSWR: ≤1.45 MAX.DC~ 110 GHz
- 4.Insertion loss: see test report
- 5.Dielectric withstand voltage: 400 VRMS
- 6.Operating temperature: -55℃~+125℃
- 7.Insulation resistance: ≥5000 MΩ
- 8.Bending radius: ≤50 MM
- 9.Shielding efficiency: ≥90DB(1GHz)
- 10.Mechanical durability: ≥500 TIMES

5					General tolerance Unless Otherwise Specified		0 Places;±0.2		4 Places;±0.2		PERFORMANCE  INTERCONNECT				
4							1 Places;±0.2		Angles;						
							2 Places;±0.2		Product:						
							3 Places;±0.2		VXT180KB						
3	Cable	VXT180KB	1PCS		Maker	Wes	Date	2022/04/24		Drawing Number		ART10F10F-T18KB-XXXX			
2	Heat-shrink tubing	BLACK	2PCS		Review		Date			Description		1.0mm Female TO 1.0mm Female T18KB XXXXMM			
1	Connector	1.0mm-F	2PCS		Approved		Date								
No	Item	Description	Qty	Remarks			Scale:1:5:1		Unit:		mm	RVE	A.0	Page	1 OF 1